## MATLAB Examples on the use of ode23 and ode45:

**Example 1:** Use **ode23** and **ode45** to solve the initial value problem for a first order differential equation:


$$y' = \frac{-ty}{\sqrt{2-y^2}}, y(0) = 1, t \in [0,5]$$

First create a *MatLab* function and name it **fun1.m**.

Now use *MatLab* functions **ode23** and **ode45** to solve the initial value problem numerically and then plot the numerical solutions y, respectively. In the *MatLab* window, type in the following commands line by line.

```
>> [tv1 f1]=ode23('fun1',[0 5],1);
>> [tv2 f2]=ode45('fun1',[0 5],1);
>> plot(tv1,f1,'-.',tv2,f2,'--')
>> title('y''=-ty/sqrt(2-y^2), y(0)=1, t in [0, 5]')
>> grid
>> axis([0 5 0 1])
```

The numerical solutions f1 and f2 respectively generated by **ode23** and **ode45** are almost the same for this example.

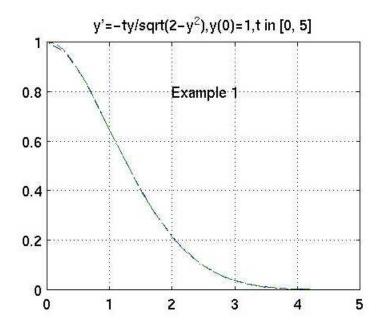

**Example 2:** Use **ode23** to solve the initial value problem for a system of first order differential equations:

```
\begin{array}{l} y_1' = 2y_1 + y_2 + 5y_3 + e^{-2t} \\ y_2' = -3y_1 - 2y_2 - 8y_3 + 2e^{-2t} - \cos\left(3t\right) \\ y_3' = 3y_1 + 3y_2 + 2y_3 + \cos\left(3t\right) \\ y_1(0) = 1, \ y_2(0) = -1, \ y_3(0) = 0 \\ t \ \text{in} \ [0, \text{pi}/2]. \end{array}
```


First, create an M-file which evaluates the right-hand side of the system F(t, Y) for any given t,  $y_1$ ,  $y_2$ , and  $y_3$  and name it **funsys.m**:

```
function Fv=funsys(t,Y);
Fv(1,1)=2*Y(1)+Y(2)+5*Y(3)+exp(-2*t);
Fv(2,1)=-3*Y(1)-2*Y(2)-8*Y(3)+2*exp(-2*t)-cos(3*t);
Fv(3,1)=3*Y(1)+3*Y(2)+2*Y(3)+cos(3*t);
```

Now type in the following commands in *MatLab* window line by line:

```
>> [tv,Yv]=ode23('funsys',[0 pi/2],[1;-1;0]);
>> plot(tv,Yv(:,1),'+',tv,Yv(:,2),'x',tv,Yv(:,3),'o')
>> hold
>> grid
>> title('Example 2')
>> text(0.3,14,'-+- y_1')
>> text(0.3,10,'-x- y_2')
>> text(0.3,-12,'-o- y_3')
>> xlabel('time')
>> hold off
```

A graph of  $y_1$ ,  $y_2$  and  $y_3$  is given below:

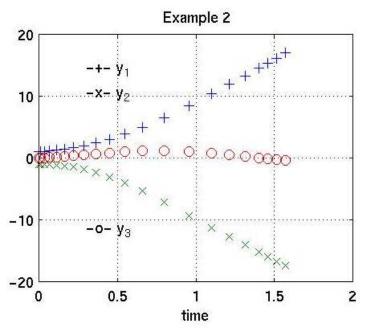

Note: try using ode45 and compare your results with those obtained by ode23.

## Example 3:

(Here, we will use m-files for both the function and the solution)

Consider the second order differential equation known as the Van der Pol equation:

$$\ddot{x} + \left(x^2 - 1\right)\dot{x} + x = 0$$

You can rewrite this as a system of coupled first order differential equations:

$$\dot{x}_1 = x_1 \left( 1 - x_2^2 \right) - x_2$$
$$\dot{x}_2 = x_1$$

The first step towards simulating this system is to create a function M-file containing these differential equations. Call it vdpol.m:

function xdot = vdpol(t,x)
xdot = [x(1).\*(1-x(2).^2)-x(2); x(1)]

Note that ode23 requires this function to accept two inputs, t and x, although the function does not use the t input in this case.

To simulate the differential equation defined in vdpol over the interval  $0 \le t \le 20$ , invoke ode23:

```
t0 = 0; tf = 20;
x0 = [0 0.25]'; % Initial conditions
[t,x] = ode23('vdpol',t0,tf,x0);
plot(t,x)
```

For more information, visit:

http://www.mathworks.com/access/helpdesk/help/techdoc/ref/ode45.shtml?cmdname=od e45

**MATLAB** Function Reference

## ode45, ode23, ode113, ode15s, ode23s, ode23t, ode23tb

Solve initial value problems for ordinary differential equations (ODEs)

## **Syntax**

[T,Y] = solver(odefun,tspan,y0) ٠ [T,Y] = solver(odefun,tspan,y0,options) • [T,Y,TE,YE,IE] = solver(odefun,tspan,y0,options) sol = solver(odefun,[t0 tf],y0...)

where solver is one of ode45, ode23, ode113, ode15s, ode23s, ode23t, or ode23tb.

Solver	Problem Type	Order of Accuracy	When to Use
ode45	Nonstiff	Medium	Most of the time. This should be the first solver you try.
ode23	Nonstiff	Low	For problems with crude error tolerances or for solving moderately stiff problems.
ode113	Nonstiff	Low to high	For problems with stringent error tolerances or for solving computationally intensive problems.
ode15s	Stiff	Low to medium	If ode45 is slow because the problem is stiff.
ode23s	Stiff	Low	If using crude error tolerances to solve stiff systems and the mass matrix is constant.
ode23t	Moderately Stiff	Low	For moderately stiff problems if you need a solution without numerical damping.
ode23tb	Stiff	Low	If using crude error tolerances to solve stiff systems